



Recommended Installation:

Use EverKem 814+ intumescent firestop caulking or similar, along flanges.


For application details and installation examples, please visit www.VulcanVents.com

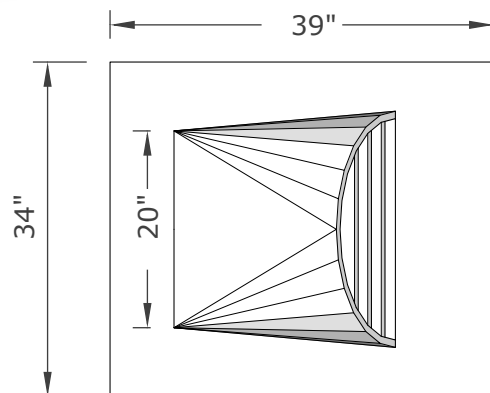


TOP VIEW

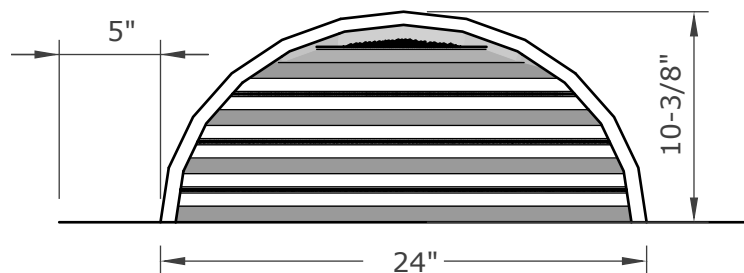


FRONT VIEW



Intumescent Core

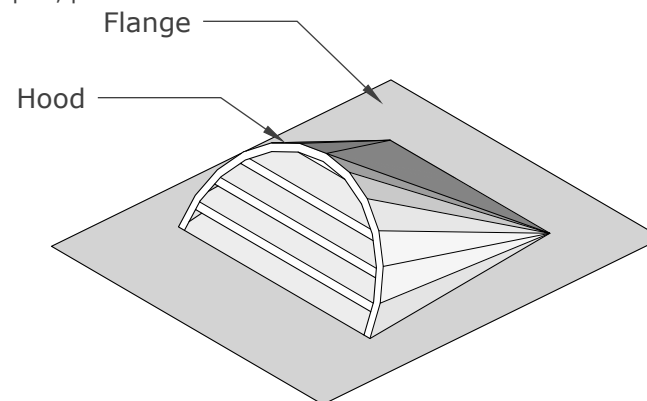

ISOMETRIC VIEW

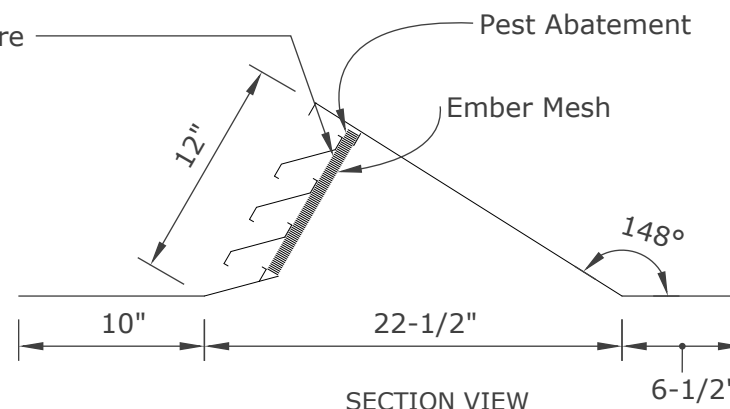

SECTION VIEW

Proudly Manufactured By:  **NEW CAL**
METALS INC.

www.newcalmetals.com

VDHR1224 PRODUCT SPECIFICATION & DATA SHEET

Model Description	Half Round Dormer Vent	Flange Type	Standard	Frame & Flange	G90 Galvanized Steel - 26GA
Model Number	VDHR1224	NFVA	90 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	12" x 24"			Ember Mesh	14 Mesh - 304 Stainless Steel
				Pest Abatement	1/8" Galvanized Steel Screen