

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

**1 Hour Fire Rated**, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM


(916) 652-7424

info@vulcanvents.com


P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455

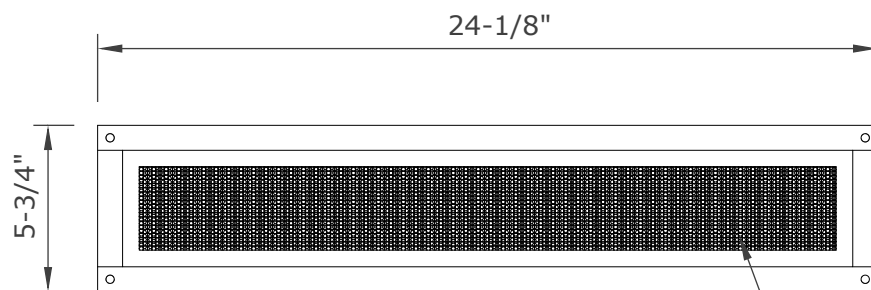


TOP VIEW

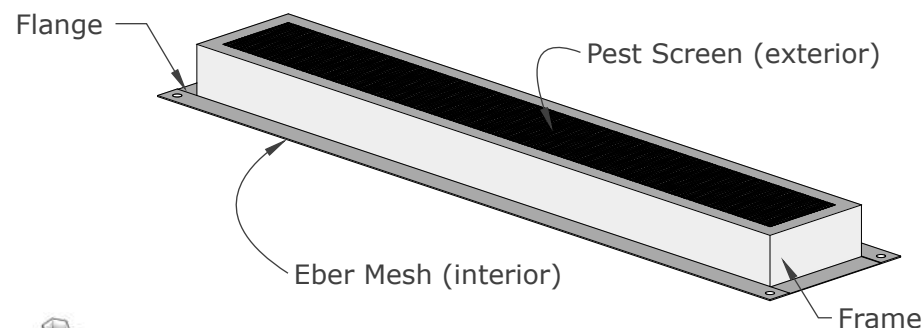


ISOMETRIC VIEW



Intumescent Core

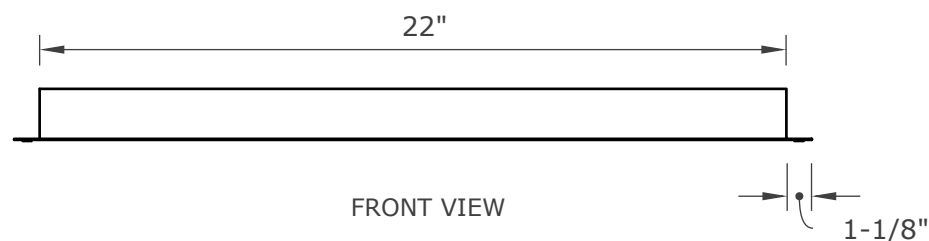

FRONT VIEW

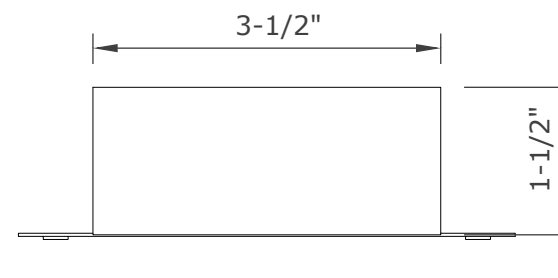

SIDE VIEW

## VE3522FB PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

|                   |                               |             |                   |                  |                                                                 |
|-------------------|-------------------------------|-------------|-------------------|------------------|-----------------------------------------------------------------|
| Model Description | <b>Foundation/Soffit Vent</b> | Flange Type | <b>Foam Back</b>  | Frame & Flange   | <b>G90 Galvanized Steel - 26GA</b>                              |
| Model Number      | <b>VE3522FB</b>               | NFVA        | <b>41 sq. in.</b> | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>22" x 3-1/2"</b>           |             |                   | Ember Mesh       | <b>14 Mesh - 304 Stainless Steel (Faces interior)</b>           |
|                   |                               |             |                   | Pest Screen      | <b>Galvanized Steel Screen - 1/8" (Faces exterior)</b>          |