

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

1 Hour Fire Rated, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM


(916) 652-7424

info@vulcanvents.com


P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455

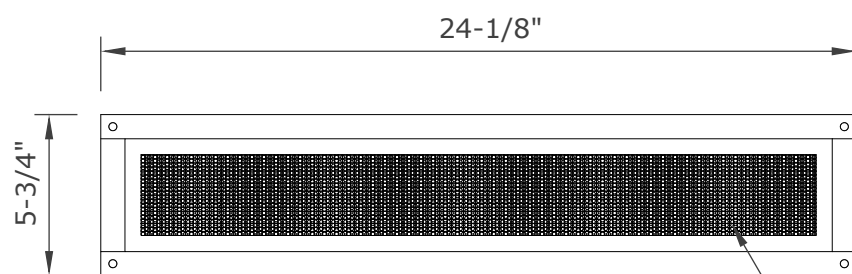


TOP VIEW

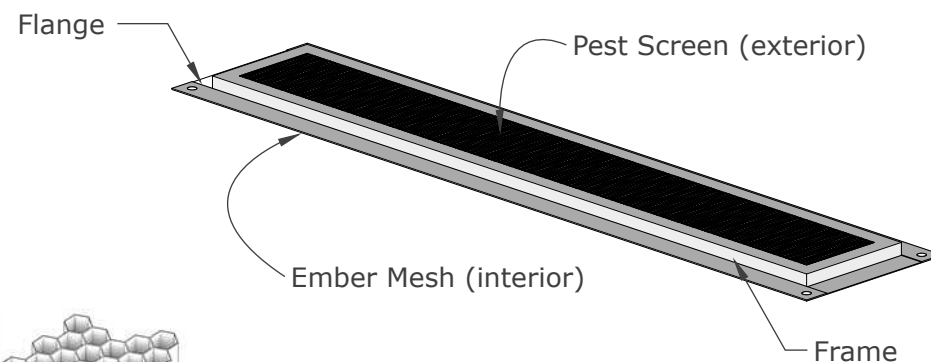


ISOMETRIC VIEW



Intumescent Core

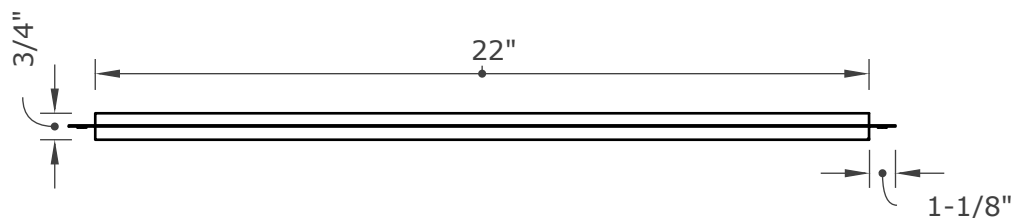

FRONT VIEW

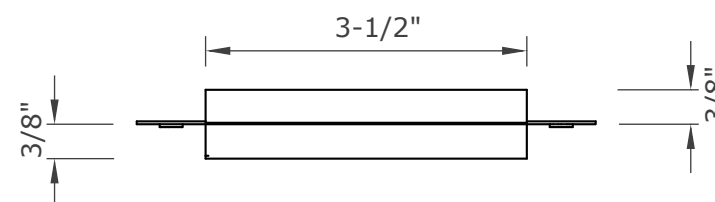

SIDE VIEW

VE3522FC PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:  **NEW CAL®**
—METALS INC.—
www.newcalmetals.com

Model Description	Foundation/Soffit Vent	Flange Type	Fiber Cement	Frame & Flange	G90 Galvanized Steel - 26GA
Model Number	VE3522FC	NFVA	41 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	22" x 3-1/2"			Ember Mesh	14 Mesh - 304 Stainless Steel (Faces interior)
				Pest Screen	Galvanized Steel Screen - 1/8" (Faces exterior)