

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

1 Hour Fire Rated, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM


(916) 652-7424

info@vulcanvents.com


P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455

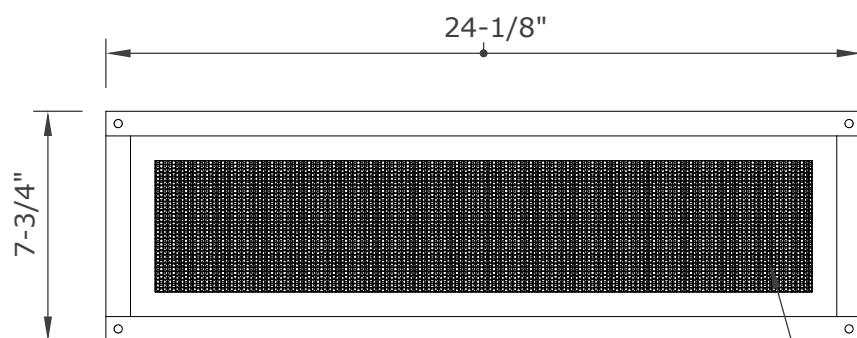


TOP VIEW

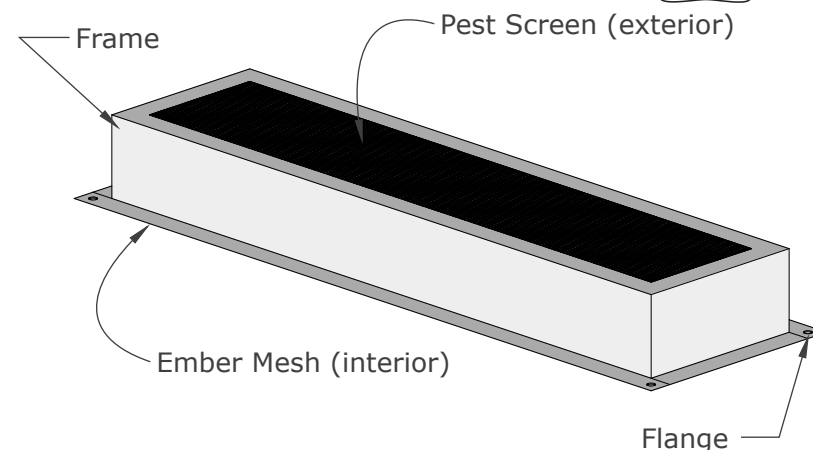


ISOMETRIC VIEW



Intumescent Core

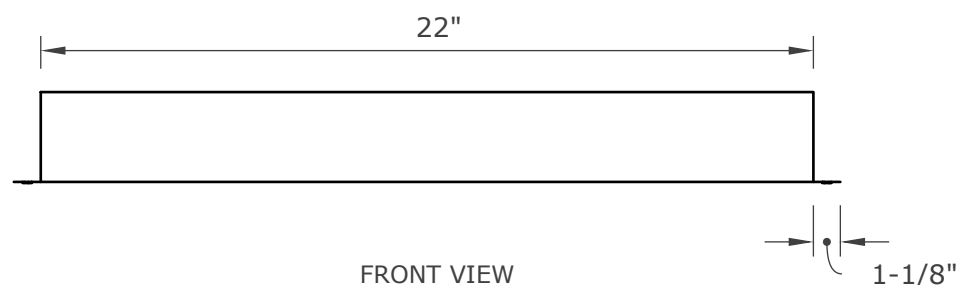

FRONT VIEW

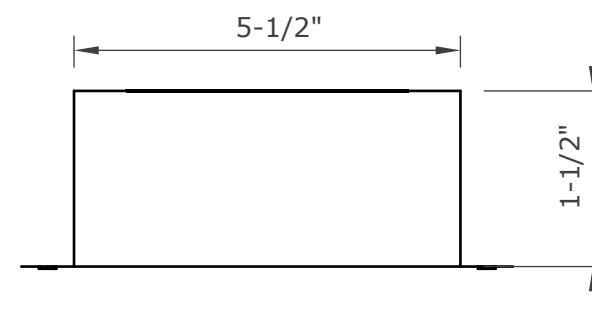

SIDE VIEW

VE5522FB PRODUCT SPECIFICATION & DATA SHEET

Model Description
Model Number
Model Size

Foundation/Soffit Vent
VE5522FB
22" x 5-1/2"

Flange Type
NFVA

Foam Back
75 sq. in.

Frame & Flange
Intumescent Core
Ember Mesh
Pest Screen

G90 Galvanized Steel - 26GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel (Faces interior)
Galvanized Steel Screen - 1/8" (Faces exterior)

Proudly Manufactured By:



www.newcalmetals.com