

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300


1 Hour Fire Rated, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM


(916) 652-7424

info@vulcanvents.com


P.O. Box 1126 Loomis, CA. 95650

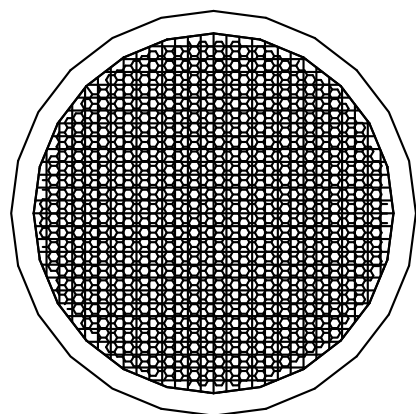


TOP VIEW




Intumescent Core

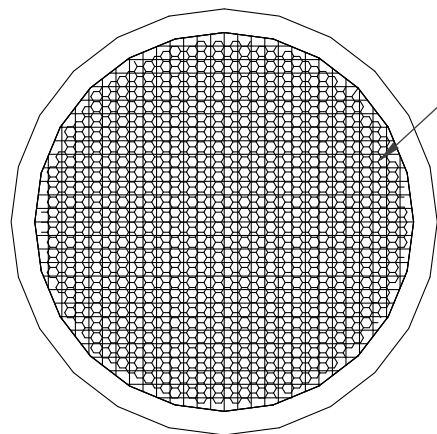

BOTTOM VIEW

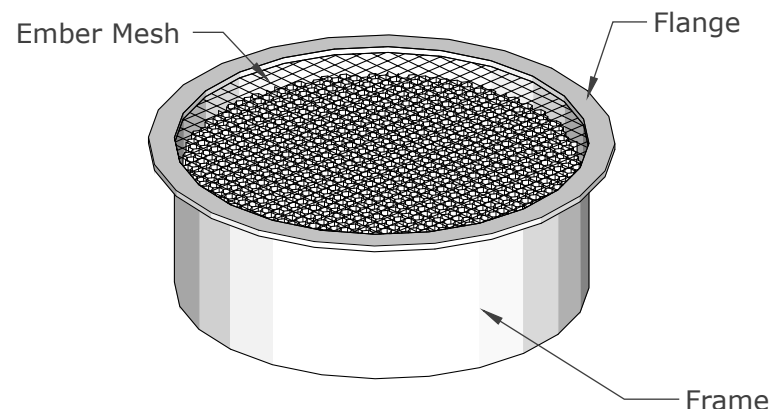

ISOMETRIC VIEW

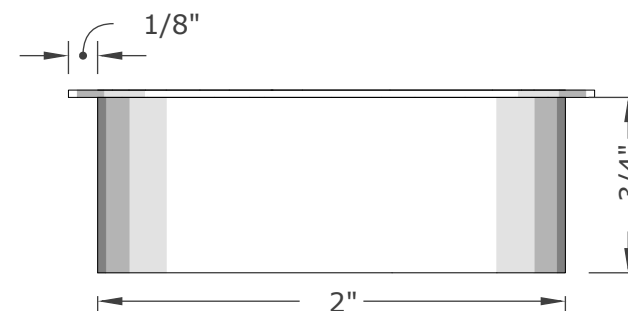

SIDE VIEW

VER2M PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description | **Round Eave Vent**
Model Number | **VER2M**
Model Size | **2" x 2"**

Flange Type | **Standard**
Face Type | **Mesh**
NFVA | **2 sq. in.**

Frame & Flange
Intumescent Core

Aluminum - 9020
5mm Hexagonal Matrix - Aluminum with intumescent coating