

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

1 Hour Fire Rated, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM

(916) 652-7424

info@vulcanvents.com

P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455




Recommended Installation:

Use EverKem 814+ intumescent firestop caulking or similar, along flanges.


For application details and installation examples, please visit www.VulcanVents.com

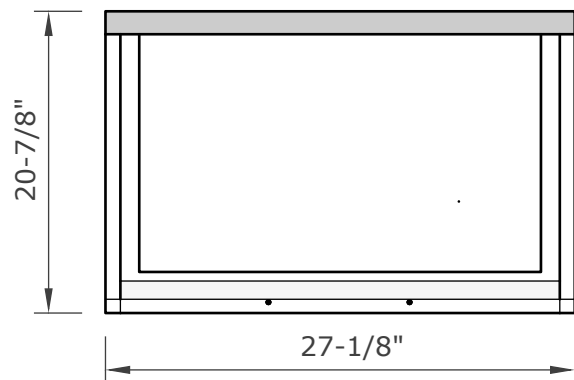

Frame Only - front view

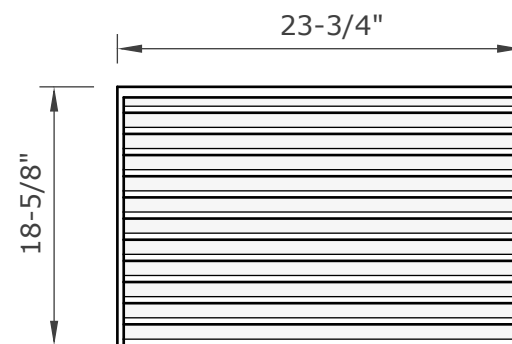



Vent Door - front view

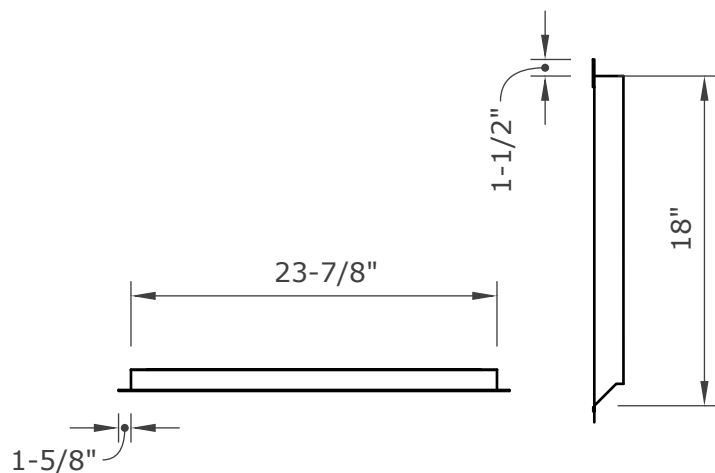

Frame Only - profile views

NOTE:

Fits 18" x 24" rough opening

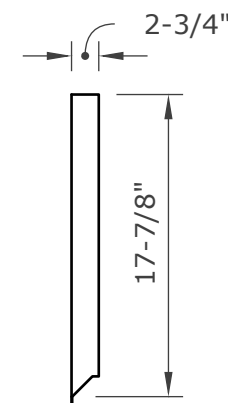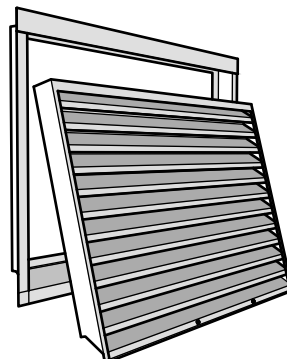

Vent Door - side view

VFS1824AV PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description | **Access Vent**
Model Number | **VFS1824AV**
Model Size | **18" x 24"**

Flange Type | **NFVA**

Flange Front | **177 sq. in.**

Frame & Flange | **Intumescent Core**
Ember Mesh

G90 Galvanized Steel - 26GA

5mm Hexagonal Matrix - Aluminum with intumescent coating

14 Mesh - 304 Stainless Steel