

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

**1 Hour Fire Rated**, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM

(916) 652-7424

info@vulcanvents.com

P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455




**Required Installation:**

**Use EverKem 814+ intumescent firestop caulking** or similar, along flanges.


For application details and installation examples, please visit [www.VulcanVents.com](http://www.VulcanVents.com)

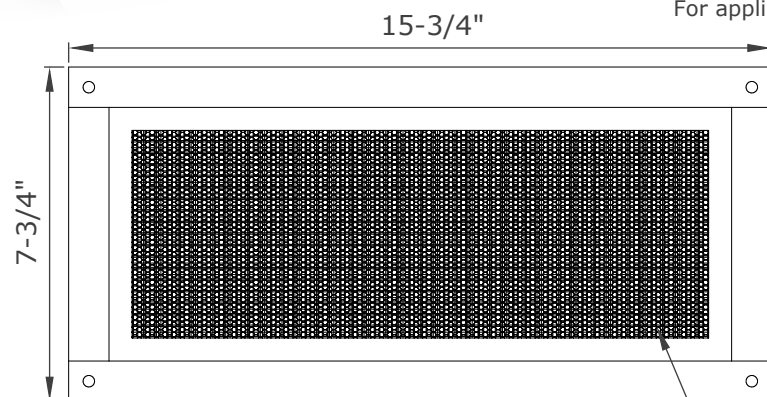


TOP VIEW




Intumescent Core

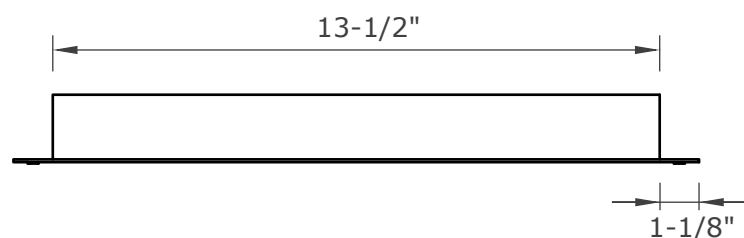

FRONT VIEW

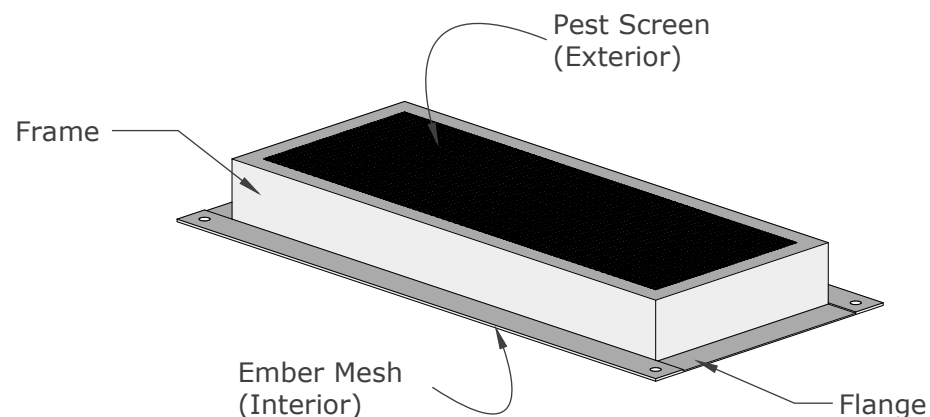

ISOMETRIC VIEW

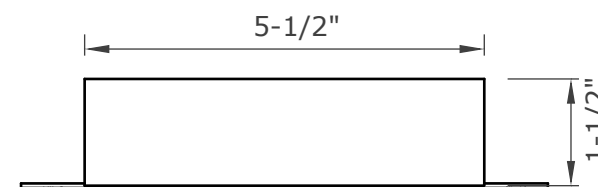

SIDE VIEW

**VFS614FB PRODUCT SPECIFICATION & DATA SHEET**

Proudly Manufactured By:



www.newcalmetals.com

|                   |                               |             |                   |                  |                                                                 |
|-------------------|-------------------------------|-------------|-------------------|------------------|-----------------------------------------------------------------|
| Model Description | <b>Foundation/Soffit Vent</b> | Flange Type | <b>41 sq. in.</b> | Frame & Flange   | <b>G90 Galvanized Steel - 26GA</b>                              |
| Model Number      | <b>VFS614FB</b>               | NFVA        |                   | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>13-1/2" x 5-1/2"</b>       |             |                   | Ember Mesh       | <b>14 Mesh - 304 Stainless Steel (Faces interior)</b>           |
|                   |                               |             |                   | Pest Screen      | <b>Galvanized Steel Screen - 1/8" (Faces exterior)</b>          |