

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

**1 Hour Fire Rated**, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM

(916) 652-7424

info@vulcanvents.com

P.O. Box 1126 Loomis, CA. 95650






1299,1300,1455




### Recommended Installation:

**Use EverKem 814+ intumescent firestop caulking** or similar, along flanges.


For application details and installation examples, please visit [www.VulcanVents.com](http://www.VulcanVents.com)

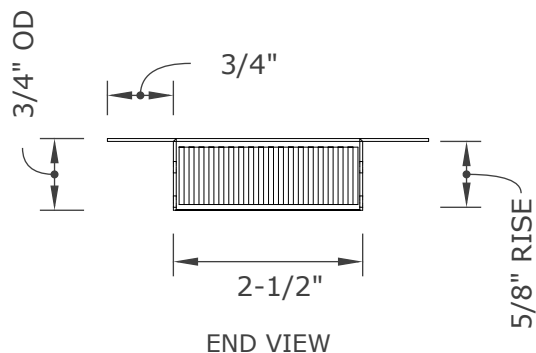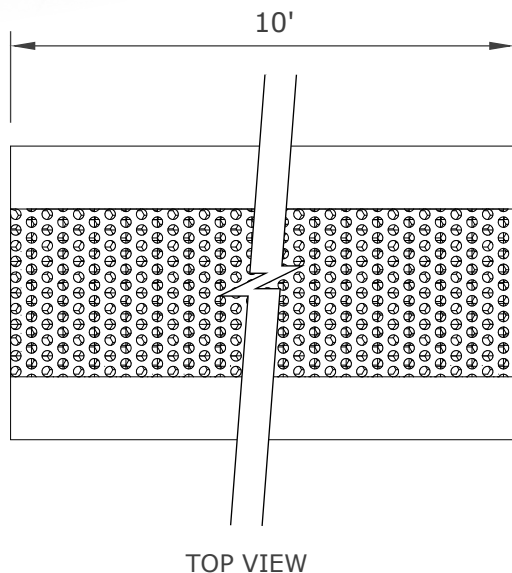

Intumescent Core

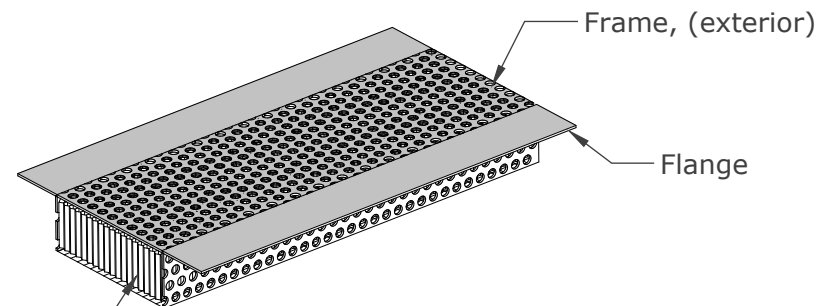

ISOMETRIC VIEWS

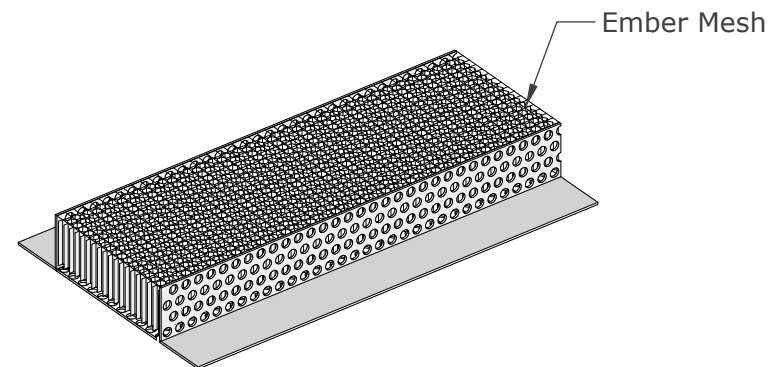

## VSC25120FF PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



[www.newcalmetals.com](http://www.newcalmetals.com)

Model Description | **Continuous Vent**  
Model Number | **VSC25120FF**  
Model Size | **2-1/2" x 120"**

Flange Type | **NFVA**

Flange Front | **120 sq. in.**

Frame & Flange | **Intumescent Core**  
Ember Mesh

**G90 Galvanized Perforated Steel (1/8" holes) - 24GA**  
**5mm Hexagonal Matrix - Aluminum with intumescent coating**  
**14 Mesh - 304 Stainless Steel**