

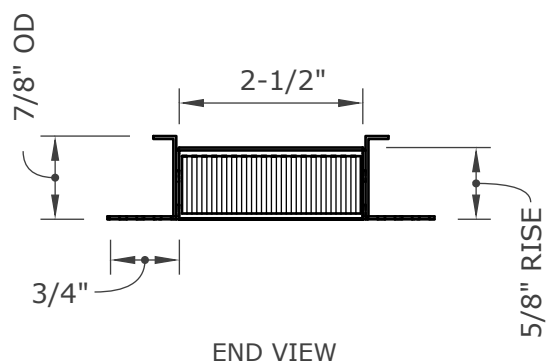



Recommended Installation:

Use EverKem 814+ intumescent firestop caulking or similar, along flanges.


For application details and installation examples, please visit www.VulcanVents.com

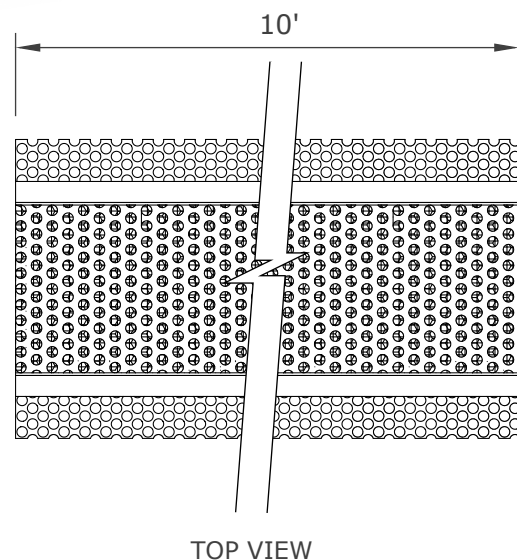

Intumescent Core

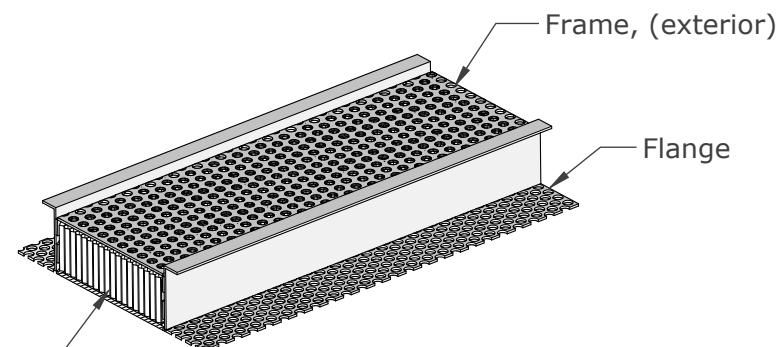

ISOMETRIC VIEWS

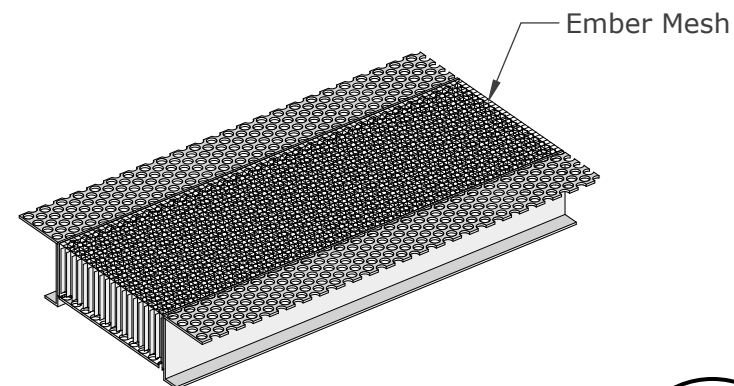

VSC25120SMC78 PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



NEW CAL
— METALS INC. —

www.newcalmetals.com

Model Description	Continuous Vent	Flange Type	Stucco MilCor 7/8"	Frame & Flange	G90 Galvanized Perforated Steel (1/8" holes) - 24GA
Model Number	VSC25120SMC78	NFVA	120 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	2-1/2" x 120"			Ember Mesh	14 Mesh - 304 Stainless Steel