



Recommended Installation:

Use EverKem 814+ intumescent firestop, or similar along flanges or similar.



For application details and installation examples, please visit www.VulcanVents.com

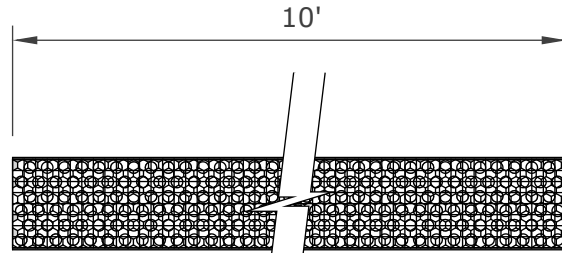

TOP VIEW

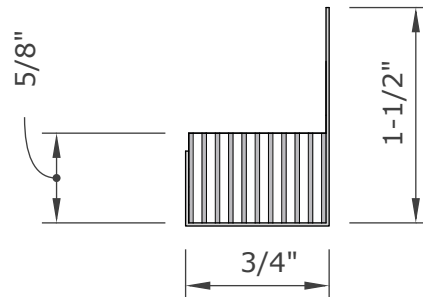

END VIEW

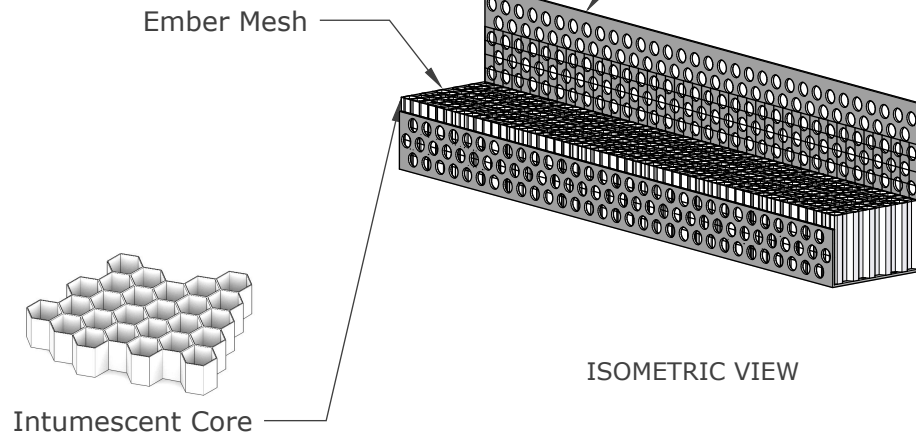

VSC34120RV PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description	Continuous Vent	Flange Type	Ridge/Wall	Frame & Flange	G90 Galvanized Perforated Steel (1/8" holes) - 24GA
Model Number	VSC34120RV	NFVA	39 sq. in.	Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
Model Size	3/4" x 120"			Ember Mesh	14 Mesh - 304 Stainless Steel