

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

**1 Hour Fire Rated**, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM

(916) 652-7424

info@vulcanvents.com

P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455




### Recommended Installation:

**Use EverKem 814+ intumescent firestop caulking** or similar, along flanges.


For application details and installation examples, please visit [www.VulcanVents.com](http://www.VulcanVents.com)

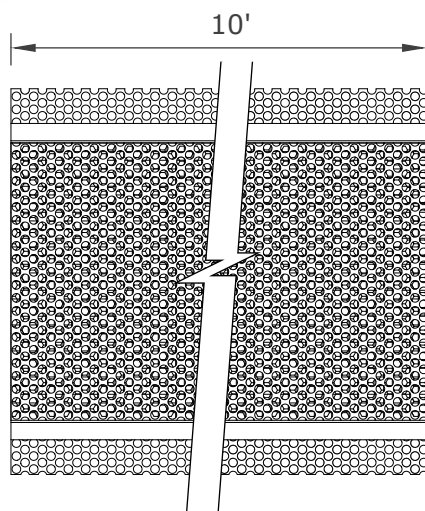



TOP VIEW

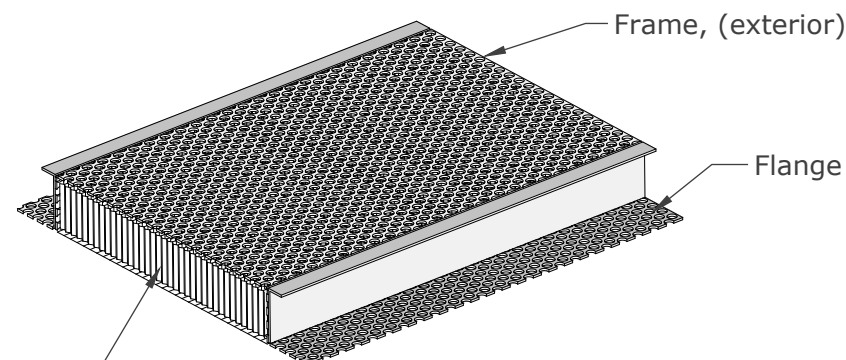

ISOMETRIC VIEWS



Intumescent Core

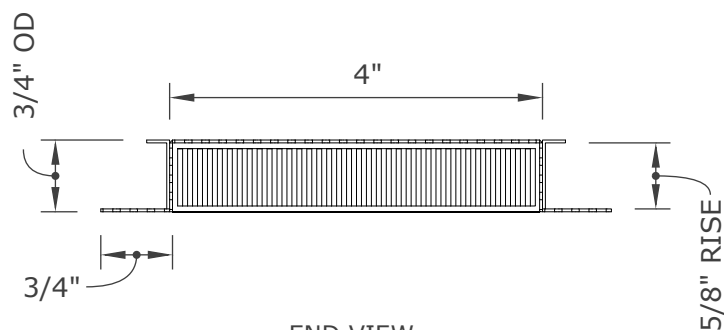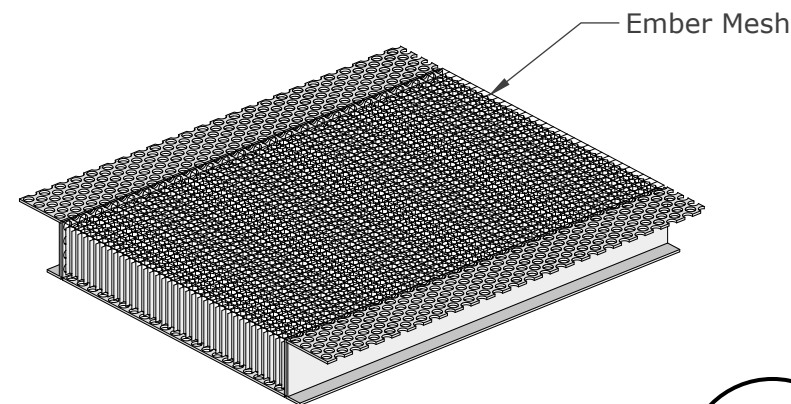

END VIEW

## VSC4120SMC34 PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

|                   |                        |             |                           |                  |                                                                 |
|-------------------|------------------------|-------------|---------------------------|------------------|-----------------------------------------------------------------|
| Model Description | <b>Continuous Vent</b> | Flange Type | <b>Stucco MilCor 3/4"</b> | Frame & Flange   | <b>G90 Galvanized Perforated Steel (1/8" holes) - 24GA</b>      |
| Model Number      | <b>VSC4120SMC34</b>    | NFVA        | <b>192 sq. in.</b>        | Intumescent Core | <b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b> |
| Model Size        | <b>4" x 120"</b>       |             |                           | Ember Mesh       | <b>14 Mesh - 304 Stainless Steel</b>                            |