

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

1 Hour Fire Rated, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM

(916) 652-7424

info@vulcanvents.com

P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455




Recommended Installation:

Use EverKem 814+ intumescent firestop caulking or similar, along flanges.


For application details and installation examples, please visit www.VulcanVents.com

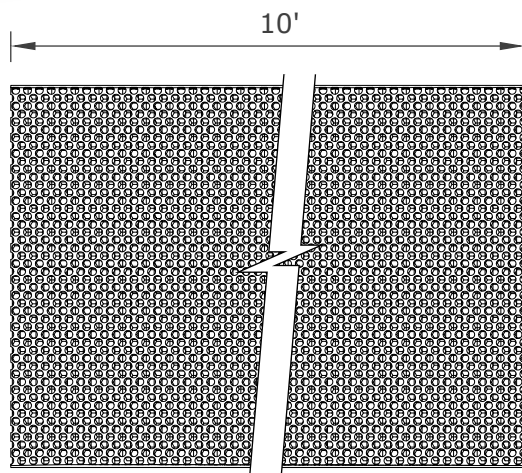


TOP VIEW

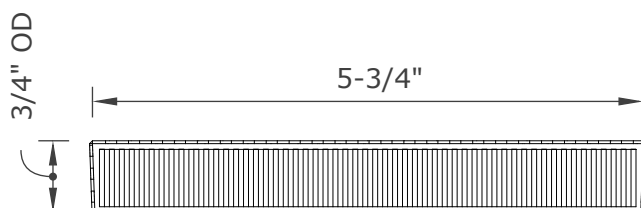

END VIEW




Intumescent Core

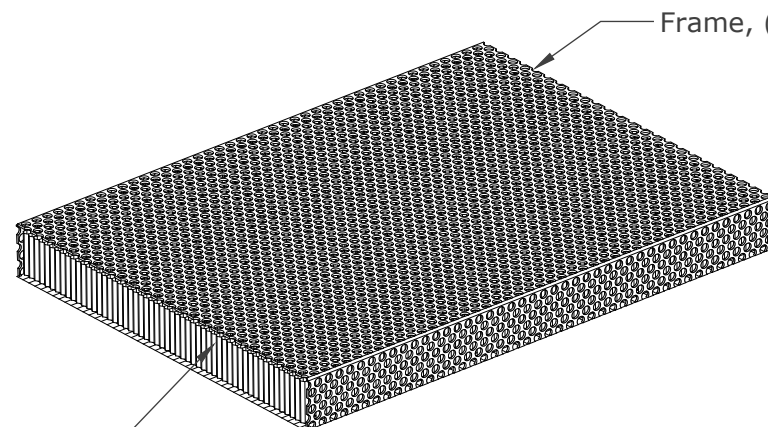

Frame, (exterior)

ISOMETRIC VIEWS

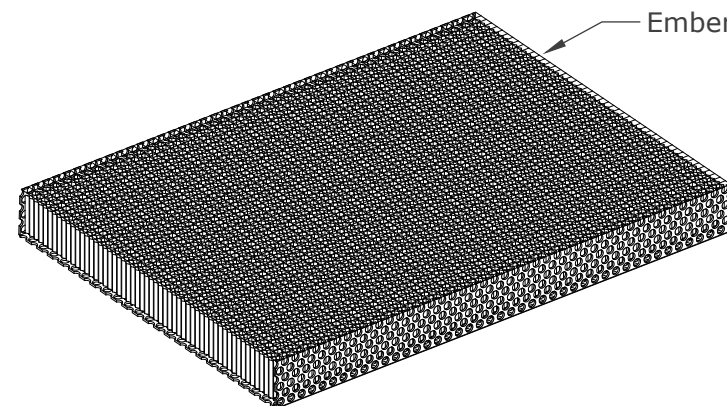

Ember Mesh

VSC6120R PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:  **NEW CAL®**
METALS INC.
www.newcalmetals.com

Model Description | **Continuous Vent**
Model Number | **VSC6120R**
Model Size | **6" x 120"**

Flange Type
NFVA

Retrofit
288 sq. in.

Frame & Flange
Intumescent Core
Ember Mesh

G90 Galvanized Perforated Steel (1/8" holes) - 24GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel