

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300


**1 Hour Fire Rated**, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM (916) 652-7424 info@vulcanvents.com P.O. Box 1126 Loomis, CA. 95650




**Recommended Installation:**


**Use EverKem 814+ intumescent firestop caulking** or similar, along flanges.  
For application details and installation examples, please visit [www.VulcanVents.com](http://www.VulcanVents.com)

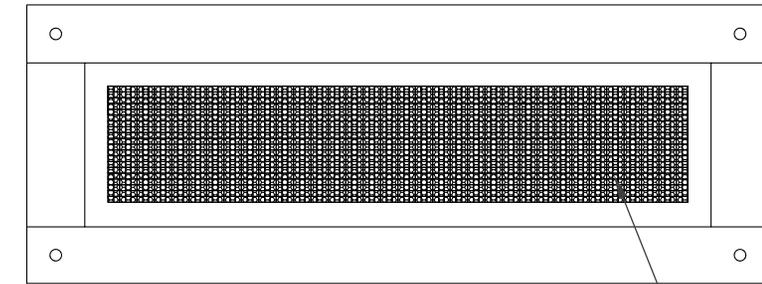


TOP VIEW

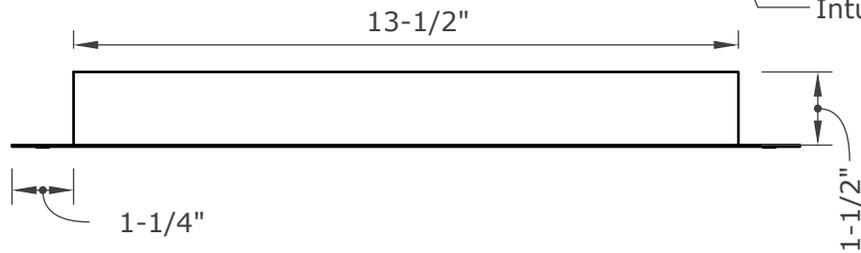


SIDE VIEW



Intumescent Core

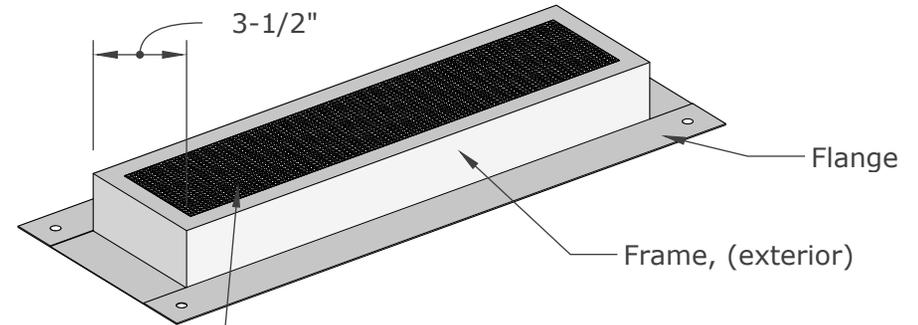

ISOMETRIC VIEWS

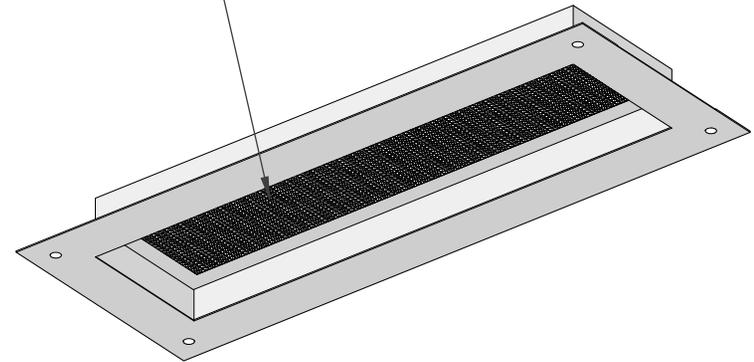

**VFS414FB PRODUCT SPECIFICATION & DATA SHEET**

Proudly Manufactured By:  **NEW CAL**  
METALS INC.

[www.newcalmetals.com](http://www.newcalmetals.com)

Model Description	<b>Foundation Vent</b>	Flange Type	<b>FoamBack</b>	Frame & Flange	<b>G90 Galvanized Steel - 26GA</b>
Model Number	<b>VFS414FB</b>			Intumescent Core	<b>5mm Hexagonal Matrix - Aluminum with intumescent coating</b>
Model Size	<b>13-1/2" x 3-1/2"</b>	NFVA	<b>24 sq. in.</b>	Ember Mesh	<b>14 Mesh - 304 Stainless Steel</b>

