

Approved for use in the Wildland Urban Interface (W.U.I.)

Chapter 7A compliant: Tested and listed to ASTM2886. ICC-ESL listing: 1300


WWW.VULCANVENTS.COM

(916) 652-7424


info@newcalmetals.com

P.O. Box 1126 Loomis, CA. 95650





TOP VIEW

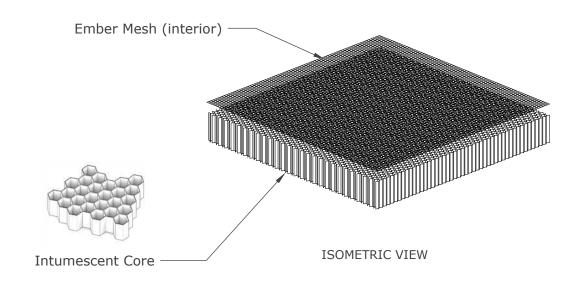

Installation

- 1. Measure your rough opening *An 1-1/2" of material overlap is recommended on all sides for installation
- 2. Score the Vulcan honeycomb matrix with utility blade
- 3. Knock off excess with a straight edge
- 4. Trim ember mesh with heavy shears
- 5. Place a bead of **EverKem 136 Fire Seal** around perimeter of rough opening
- 6. Layer Vulcan matrix 1st then ember mesh last
- 7. Secure material overlap using 1" wide washers and mounting screws
- 8. Use caution so as not to collapse the Vulcan matrix when mounting

https://www.vulcanvents.com/02-vm1424-gable-inst-2021/

SIDE VIEW

Proudly Manufactured By:



www.newcalmetals.com

VM2424 PRODUCT SPECIFICATION & DATA SHEET

Model Description | Vulcan Matrix Model Number Model Size

VM2424 24" x 24" Flange Type N/A NFVA

Dependant

Frame & Flange Intumescent Core Ember Mesh

5mm Hexagonal Matrix - Aluminum with intumescent coating 14 Mesh - 304 Stainless Steel (Faces interior)