

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

**1 Hour Fire Rated**, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM (916) 652-7424 info@newcalmetals.com P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455




**Recommended Installation:**


**Use EverKem 814+ intumescent firestop caulking** or similar, along flanges.  
For application details and installation examples, please visit [www.VulcanVents.com](http://www.VulcanVents.com)

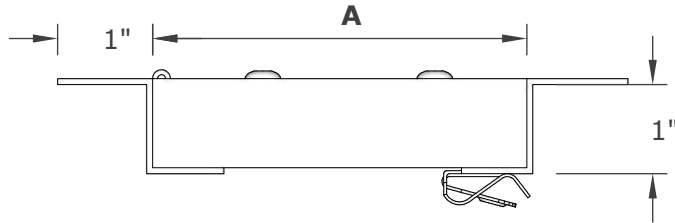


**End View**




\* Low profile, hinged assembly for easy inspections.

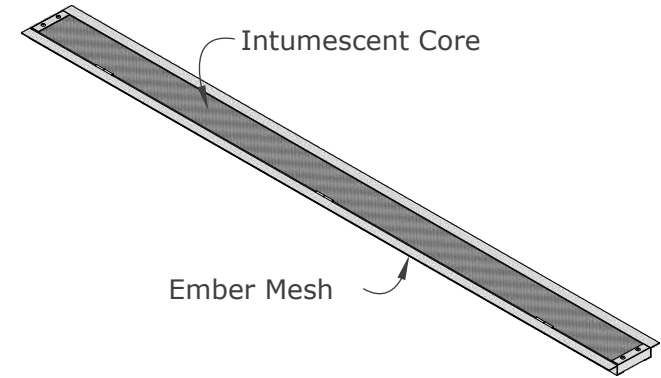


**Isometric View**

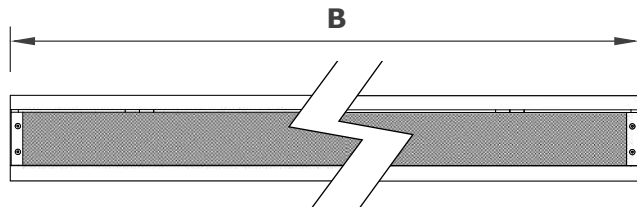

**Top View**



Quick, secure access.

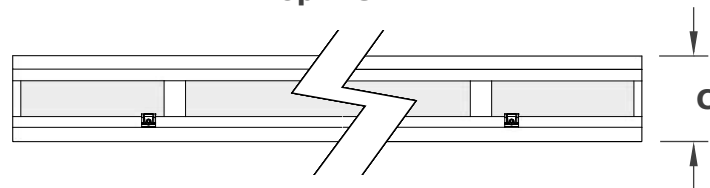

**Bottom View**


For use to comply with SB 721, SB 326 where decks and balconies (EEE) require inspection. Vulcan Vents have been tested and listed to ASTM E2886 and carry a 1 hour fire rating listed by ICC.  
All NFVA have been verified by ICC's engineering division.

A	B	C	NFVA
4"	24"	6"	39 SI
4"	36"	6"	58 SI
4"	48"	6"	77 SI
4"	60"	6"	96 SI
4"	72"	6"	115 SI
4"	120"	6"	192 SI

\* Door is interchangeable with our non-fire rated vent option.

Proudly Manufactured By:  **NEW CAL**  
METALS INC.

[www.newcalmetals.com](http://www.newcalmetals.com)



**VSC4120IF PRODUCT SPECIFICATION & DATA SHEET**

Model Description | **Continuous**  
Model Number | **VSC4120IF**  
Model Size | **120" x 4"**

Flange Type | **Inspection**  
NFVA | **192 sq. in.**

Frame & Flange | **G90 Galvanized Steel - 24GA**  
Intumescent Core | **5mm Hexagonal Matrix - Aluminum with intumescent coating**  
Ember Mesh | **14 Mesh - 304 Stainless Steel (Faces interior)**