

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2192, ICC-ESL listing: 1299, 1300

1 Hour Fire Rated, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]


WWW.VULCANVENTS.COM (916) 652-7424 info@newcalmetals.com P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455




For use to comply with SB 721, SB 326 where decks and balconies (EEE) require inspection.

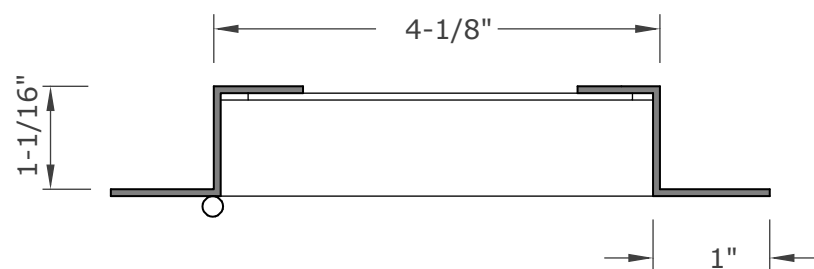

FRAME ONLY (END VIEW)

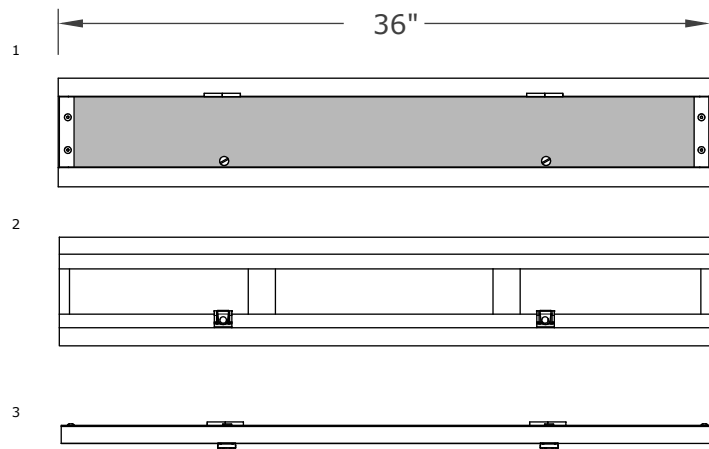

TOP, BOTTOM, ELEVATION VIEWS

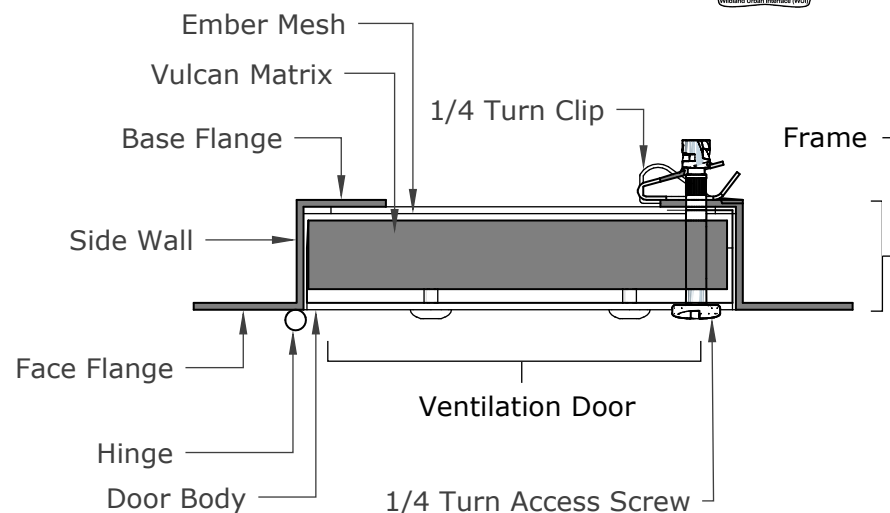

DETAILED VIEW

Installation Notes:

Remove door before installation. Base flange is recommended for mounting.

Apply **EverKem 814+ intumescent fire caulking** or similar on back side of face flange and side wall prior to installation.

Use min #12 x 1-1/2", pancake head fasteners, 2 per joist w/ max span of 24".
Min fastener shank penetration into joist: 1-1/2".
When mounting depth is greater than 1", consider furring strips.

For detailed installation examples, please visit: www.vulcanvents.com

Non-fire rated and ember only options are available from New Cal Metals.

VSC436IF PRODUCT SPECIFICATION & DATA SHEET

Model Description	Continuous	Flange Type	Inspection	Frame & Flange	G90 Galvanized Steel - 20GA
Model Number	VSC436IF	NFVA	58 sq. in.	Ventilation Door	G90 Galvanized Steel - 24GA
Model Size	36" x 4"			Intumescent Core	5mm Hexagonal Matrix - Aluminum with intumescent coating
				Ember Mesh	14 Mesh - 304 Stainless Steel

Proudly Manufactured By:  **NEW CAL**
METALS INC.

www.newcalmetals.com

