

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

1 Hour Fire Rated, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]



1299,1300,1455




WWW.VULCANVENTS.COM (916) 652-7424 info@newcalmetals.com P.O. Box 1126 Loomis, CA. 95650




Recommended Installation:


Use EverKem 814+ intumescent firestop caulking or similar, along flanges.
For application details and installation examples, please visit www.VulcanVents.com

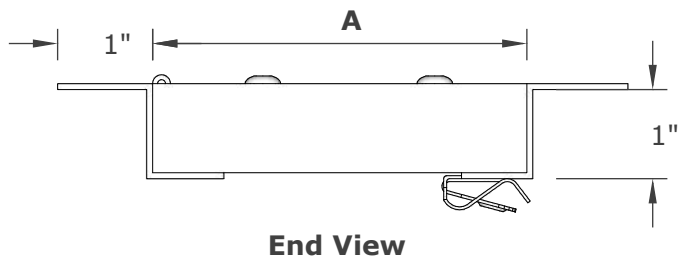

End View




* Low profile, hinged assembly for easy inspections.

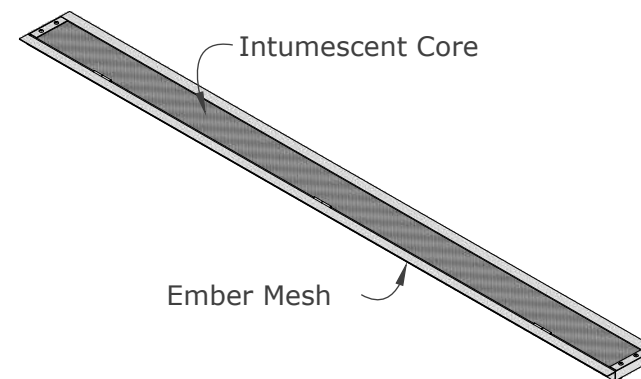


Isometric View

For use to comply with SB 721, SB 326 where decks and balconies (EEE) require inspection. Vulcan Vents have been tested and listed to ASTM E2886 and carry a 1 hour fire rating listed by ICC. All NFVA have been verified by ICC's engineering division.


A	B	C	NFVA
4"	24"	6"	39 SI
4"	36"	6"	58 SI
4"	48"	6"	77 SI
4"	60"	6"	96 SI
4"	72"	6"	115 SI
4"	120"	6"	192 SI

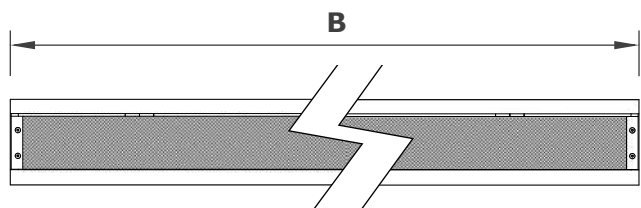

Top View



Quick, secure access.

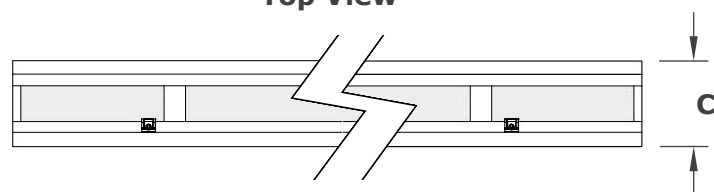


Bottom View

* Door is interchangeable with our non-fire rated vent option.

Proudly Manufactured By: **NEW CAL METALS INC.**

www.newcalmetals.com



VSC460IF PRODUCT SPECIFICATION & DATA SHEET

Model Description | **Continuous**
Model Number | **VSC460IF**
Model Size | **60" x 4"**

Flange Type | **Inspection**
NFVA | **96 sq. in.**

Frame & Flange | **G90 Galvanized Steel - 24GA**
Intumescent Core | **5mm Hexagonal Matrix - Aluminum with intumescent coating**
Ember Mesh | **14 Mesh - 304 Stainless Steel (Faces interior)**