

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

**1 Hour Fire Rated**, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]



1299,1300,1455





WWW.VULCANVENTS.COM (916) 652-7424 info@newcalmetals.com P.O. Box 1126 Loomis, CA. 95650




**Recommended Installation:**

**Use EverKem 814+ intumescent firestop caulking** or similar, along flanges.  
For application details and installation examples, please visit [www.VulcanVents.com](http://www.VulcanVents.com)

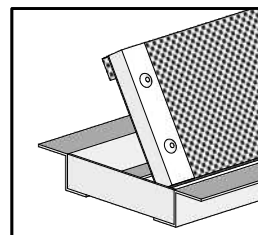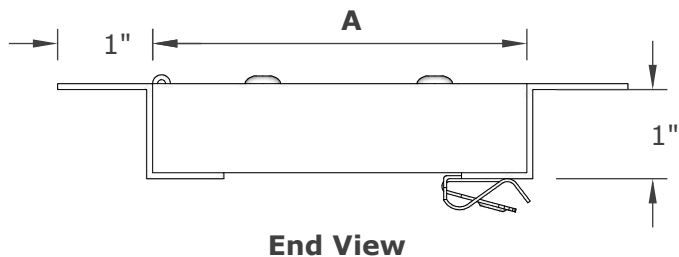



\* Low profile, hinged assembly for easy inspections.

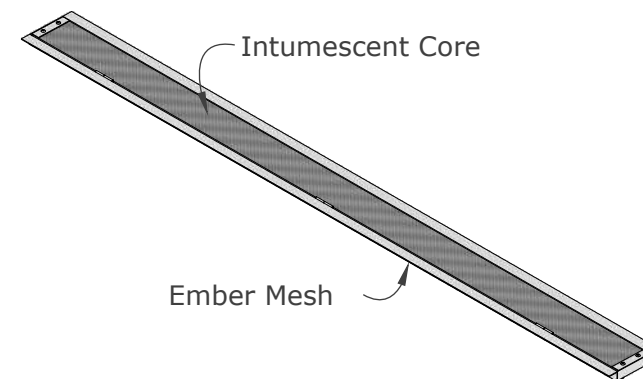


**Isometric View**

For use to comply with SB 721, SB 326 where decks and balconies (EEE) require inspection. Vulcan Vents have been tested and listed to ASTM E2886 and carry a 1 hour fire rating listed by ICC. All NFVA have been verified by ICC's engineering division.

| A  | B    | C  | NFVA   |
|----|------|----|--------|
| 4" | 24"  | 6" | 39 SI  |
| 4" | 36"  | 6" | 58 SI  |
| 4" | 48"  | 6" | 77 SI  |
| 4" | 60"  | 6" | 96 SI  |
| 4" | 72"  | 6" | 115 SI |
| 4" | 120" | 6" | 192 SI |

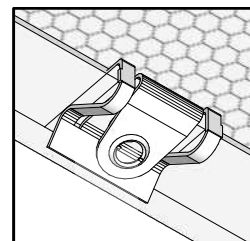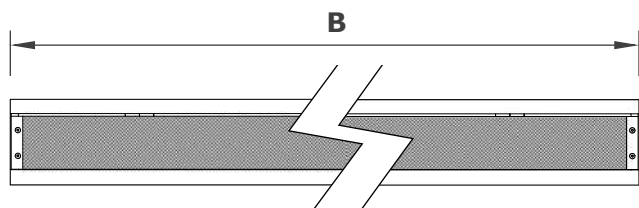


Quick, secure access.

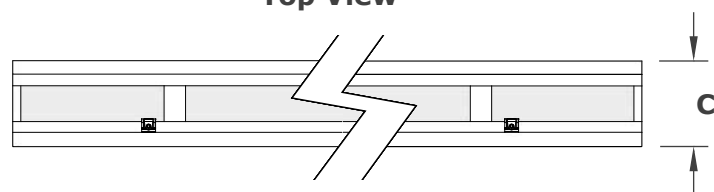

\* Door is interchangeable with our non-fire rated vent option.

Proudly Manufactured By:  **NEW CAL METALS INC.**

[www.newcalmetals.com](http://www.newcalmetals.com)



**VSC472IF PRODUCT SPECIFICATION & DATA SHEET**

Model Description | **Continuous**  
Model Number | **VSC472IF**  
Model Size | **72" x 4"**

Flange Type | **Inspection**  
NFVA | **115 sq. in.**

Frame & Flange | **G90 Galvanized Steel - 24GA**  
Intumescent Core | **5mm Hexagonal Matrix - Aluminum with intumescent coating**  
Ember Mesh | **14 Mesh - 304 Stainless Steel (Faces interior)**