

Chapter 7A compliant: Tested and listed to ASTM2886.
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

1 Hour Fire Rated, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM

(916) 652-7424

info@vulcanvents.com

P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455




Recommended Installation:

Use EverKem 814+ intumescent firestop caulking or similar, along flanges.


For application details and installation examples, please visit www.VulcanVents.com

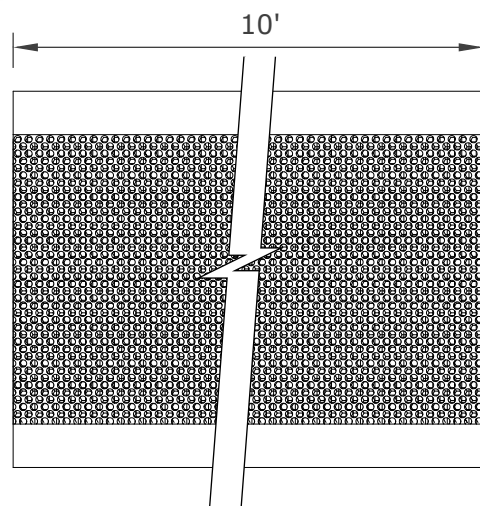


TOP VIEW

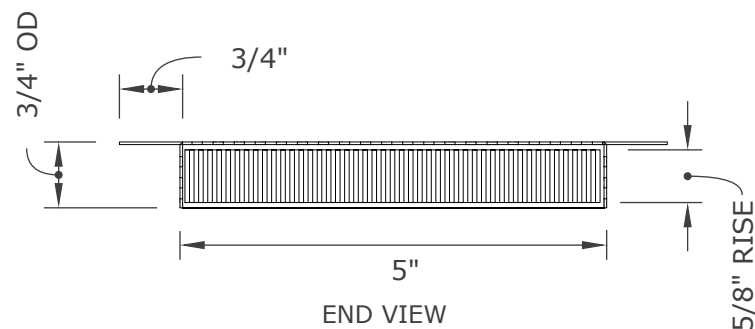


END VIEW



Intumescent Core

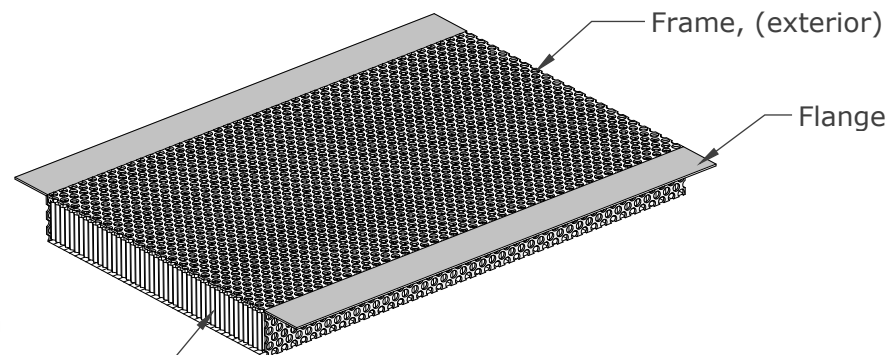

ISOMETRIC VIEWS

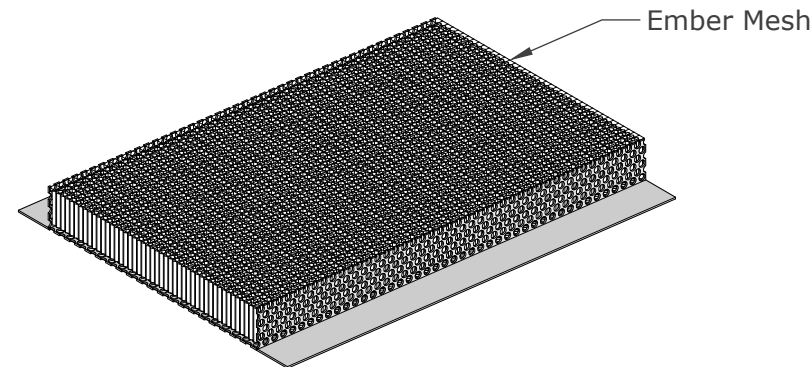

Ember Mesh

VSC5120FF PRODUCT SPECIFICATION & DATA SHEET

Proudly Manufactured By:



www.newcalmetals.com

Model Description | **Continuous Vent**
Model Number | **VSC5120FF**
Model Size | **5" x 120"**

Flange Type | **NFVA**

Flange Front | **240 sq. in.**

Frame & Flange
Intumescent Core
Ember Mesh

G90 Galvanized Perforated Steel (1/8" holes) - 24GA
5mm Hexagonal Matrix - Aluminum with intumescent coating
14 Mesh - 304 Stainless Steel