

**Chapter 7A** compliant: Tested and listed to ASTM2886.  
OSFM BML listing: 8165-2192, ICC-ESL listing: 1300

**1 Hour Fire Rated**, ICC-ESL listing: 1299. **Canadian Compliance** : ICC-ESL: 1455 [CAN/ULC-S101-14]

WWW.VULCANVENTS.COM

(916) 652-7424

info@vulcanvents.com

P.O. Box 1126 Loomis, CA. 95650




1299,1300,1455




### Recommended Installation:

**Use EverKem 814+ intumescent firestop caulking** or similar, along flanges.


For application details and installation examples, please visit [www.VulcanVents.com](http://www.VulcanVents.com)

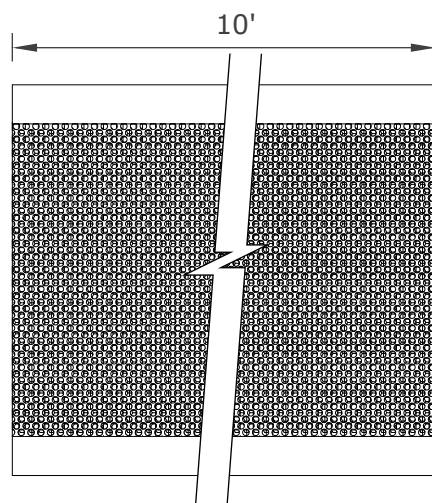


TOP VIEW

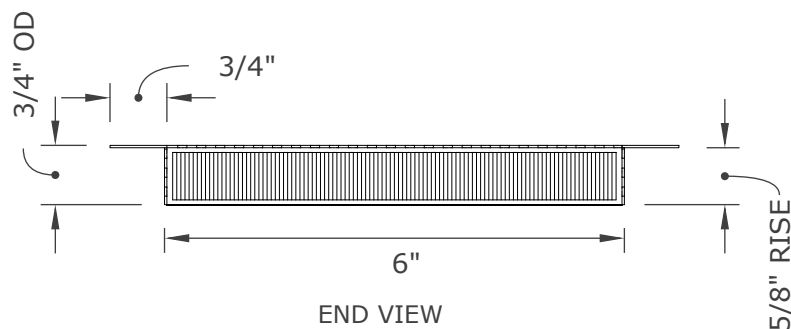


END VIEW



Intumescent Core

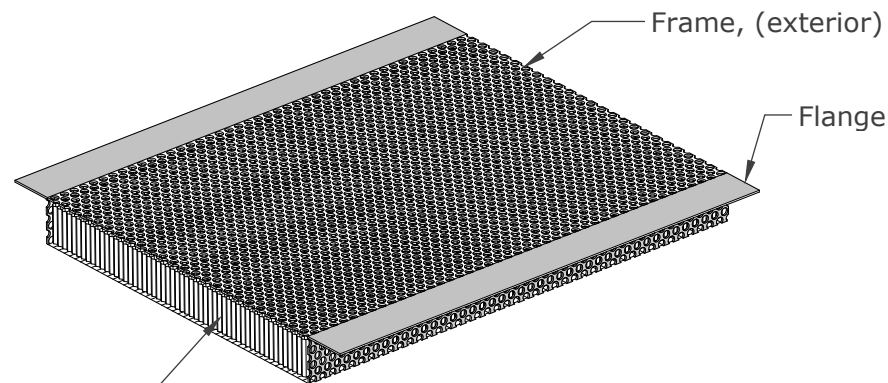

ISOMETRIC VIEWS

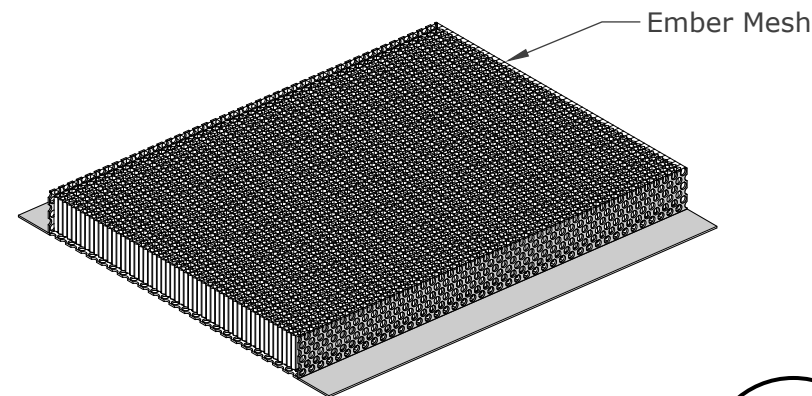

Ember Mesh

## VSC6120FF PRODUCT SPECIFICATION & DATA SHEET

Model Description | **Continuous Vent**  
Model Number | **VSC6120FF**  
Model Size | **6" x 120"**

Flange Type  
NFVA

Flange Front  
**288 sq. in.**

Frame & Flange  
Intumescent Core  
Ember Mesh

**G90 Galvanized Perforated Steel (1/8" holes) - 24GA**  
**5mm Hexagonal Matrix - Aluminum with intumescent coating**  
**14 Mesh - 304 Stainless Steel**

Proudly Manufactured By:



[www.newcalmetals.com](http://www.newcalmetals.com)

